


Conference Room

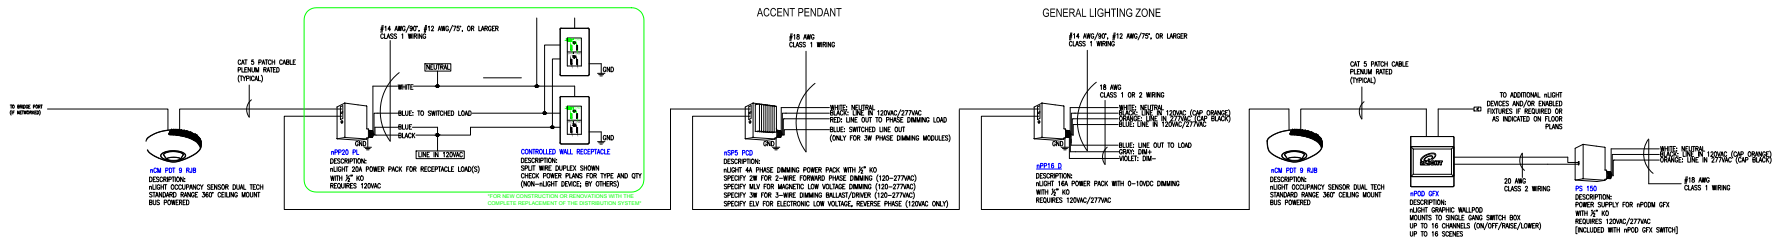

TYPICAL CONFERENCE ROOM USING nLIGHT POWER PACKS AND GRAPHIC WALLPOD SWITCH (MULTIPLE LIGHTING ZONES)

REFER TO PLANS FOR TYPES AND QUANTITIES

T24 2016 COMPLIANT SEQUENCE OF OPERATION:

- OCCUPANCY SENSOR PROVIDES PARTIAL ON TO 70% AND AUTOMATIC OFF OF LIGHTS AND CONTROLLED RECEPTACLES BASED ON ROOM OCCUPANCY (USE 10 MINUTE DEFAULT TIME DELAY FOR OCCUPANCY SENSOR).
- DUAL ZONE PHOTOCELL SHALL AUTOMATICALLY REDUCE GENERAL LIGHTING IN BOTH PRIMARY AND SECONDARY DAYLIT ZONES BASED ON DAYLIGHT TO MAINTAIN DESIGN ILLUMINANCE.
- nPOD GFK SWITCH PROVIDES MANUAL OVERRIDE OF THE LIGHTS: UP TO 16 CHANNELS ON/OFF/RAISE/LOWER, AND UP TO 16 PRESET SCENES.